

NEW

Lo-Watt Whole House Heat Recovery

The Windsor Range

MANHR6000



The powerful MANHR6000 is capable of 110 litres per second at 150Pa, suitable for large houses and commercial properties. With two independently adjustable EC/DC motors, balancing the system for optimum economy and low noise is straightforward. One of the two switched live inputs features a delay-on feature, especially useful for bathroom switching applications.

Features & Benefits


- Weighs only 24kg
- Tool free filter access
- Accessible condensate connection
- External controllers and sensors available
- Vertical or horizontal duct connections
- Up to 94% heat recovery
- Automatic frost protection
- Live switching to boost
- Filter check reminder
- Thermal Bypass
- F5 Filter (pollen) option
- ErP Compliant

Technical Details

Model No. Product Type

| | |
|-------------|--------------|
| MANHR6000PL | Left handed |
| MANHR6000PR | Right handed |

Performance

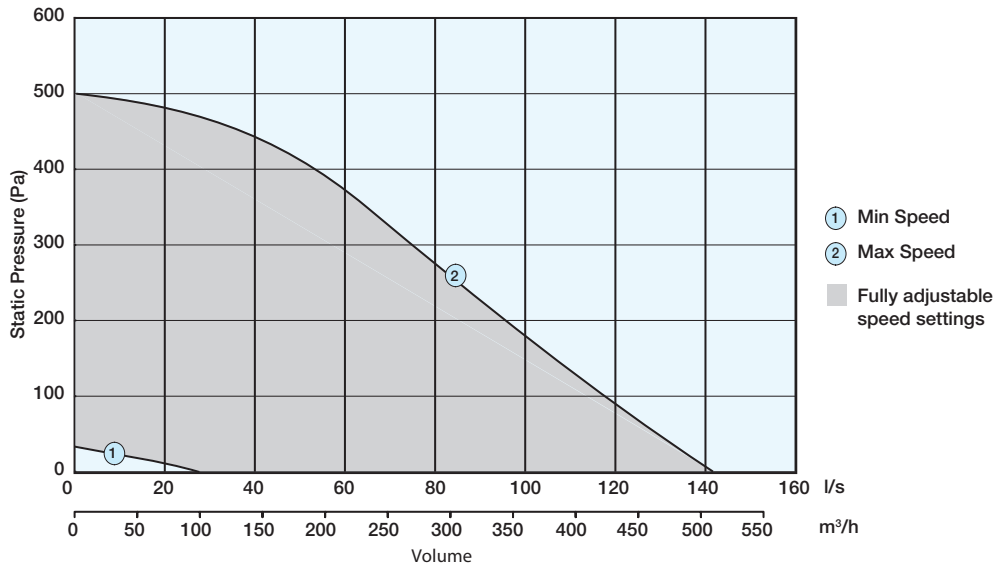

PCDB Performance

Exhaust terminal configuration

| | | |
|---------------------------------|------|----|
| Kitchen + 1 additional wet room | 0.41 | 94 |
| Kitchen + 2 additional wet room | 0.40 | 94 |
| Kitchen + 3 additional wet room | 0.43 | 94 |
| Kitchen + 4 additional wet room | 0.45 | 94 |
| Kitchen + 5 additional wet room | 0.52 | 93 |
| Kitchen + 6 additional wet room | 0.61 | 93 |
| Kitchen + 7 additional wet room | 0.73 | 93 |

Specific fan power W/l/s

Heat Recovery Efficiency %

Typical Installation

